


3M Construction & Home Improvement Markets

Product Information Sheet

Product Name: Scotch-Blue™ Multi-Surface Painters' Tape
Cat. No. 2090

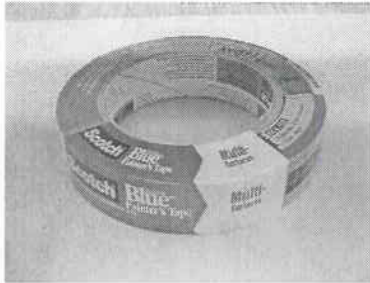

General Description

Scotch-Blue Multi-Surface Painters' Tape is a blue masking tape with a medium level of adhesion. It is ideal for painted walls and trim, woodwork, glass and metal. Can be removed cleanly for up to 14 days even in direct sunlight.

Construction	Description
Backing	Crepe paper
Adhesive	Acrylic
Standard Roll Length	60 yds.
Color	Blue

Typical Physical Properties		Note: The following technical information and data should be considered representative or typical only and should not be used for specification purposes.
Adhesion to Steel	25 oz./in.	ASTM D - 3330
Tensile Strength	27 lbs. /in.	ASTM D - 3759
Elongation at Break	6.7 %	ASTM D - 3759
Total Thickness	5.7 mils	ASTM D - 3652
Warnings: Do not use with or on lacquers, wallpapers, unpainted wallboard, wood floors or poorly bonded finishes.		

Features	Advantages	Benefits
Acrylic Adhesive	Adhesive transfer resistance for 14 days	Improves on-sight management of taping
	Increased light stability	Clean removal / reduces labor
	Medium adhesion	Sticks easily/ reduces labor
	Controlled tack	Minimal adhesion build, clean removal, doesn't damage masked surfaces
Crepe paper	Smoothness	Consistent surface contact / secure holding
	Conformability	Easy Handling
	Strong	Won't sliver when removed
Backing saturant	Solvent and moisture resistance	Resists paint bleed-through and adhesive doesn't soften or transfer when tape is wet
	Easy tear	Easy handling
Exclusive backsize treatment	Controlled unwind	Easy to use/ reduces waste Can be used with masking tools

3M Construction and Home Improvement Markets Division
3M Center, Building 251-1C-09
St. Paul, MN 55144-1000

IMPORTANT NOTICE: All statements, technical information and recommendations herein are based on tests 3M believes to be reliable. 3M does not warrant or guarantee the accuracy or completeness of this information. THE FOLLOWING IS MADE IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE: 3M's only obligation shall be to replace such quantity of this 3M product proved to be defective. User is responsible for determining whether this 3M product is fit for a particular purpose and suitable for user's method of application. Because there are many factors that can affect the use and performance of this product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate this product to determine whether it is fit for a particular purpose, is suitable for the user's method of application, and meets the user's performance specifications and expectations.

Limitation of Liability: 3M SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGES, WHETHER DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL (INCLUDING BUT NOT LIMITED TO LOST PROFITS, BUSINESS, OR REVENUES) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS 3M PRODUCT, WARRANTY, OR STRICT LIABILITY. No statement or recommendation not contained herein shall have any force or effect unless contained in an agreement signed by a 3M officer.



Construction & Home Improvement Markets

Product Information Sheet

(Oct. 2004)

PRODUCT NAME: Scotch® Home & Shop Duct Tape (#130, #135, #134, #129)

PRODUCT DESCRIPTION:

An all purpose, duct tape that is excellent for a variety of general household and shop applications.

PRODUCT CONSTRUCTION:

Backing: Waterproof, polyethylene coated, multi filament scrim
 Adhesive: Rubber resin

AVERAGE PHYSICAL PROPERTIES:

		<u>ASTM TEST METHOD</u>	
Adhesion to Steel:	55 oz./in. width	(60 N/100mm)	D-3330
Tensile Strength	23 lbs./in. width	(403 N/100mm)	D-3759
Elongation at Break	18%		D-3759
Total Thickness	7.8 mils	(0.229 mm)	D-3652
Maximum Temperature	173° F	(78 deg. C)	

AVAILABLE SIZES:

Catalog # 129	1.88" x 10 yd.	48mm x 9,14 m
Catalog # 134	1.88" x 30 yd.	48mm x 27,4 m
Catalog # 135	1.88" x 45 yd.	48mm x 41,1 m
Catalog # 130	1.88' x 60 yd.	48mm x 54,8 m

COLORS:

Silver

APPLICATIONS:

- * Holding/securing
- * Re-gripping handles
- * Reinforcing
- * Hanging/draping lightweight polyethylene sheeting
- * Seaming
- * Sealing
- * Splicing
- * Bundling
- * Temporary/general repair
- * Packaging/box sealing

PRODUCT BENEFITS:

- * Durable
- * Waterproof backing
- * Good bonding strength
- * Low tack edges
- * Very Conformable
- * Excellent tack
- * Easy open packaging
- * Tears easily
- * Easy unwind
- * Excellent adhesion

STORAGE AND USE CONDITIONS:

To obtain best performance, use this product within one year from date of purchase and store under normal conditions of 70° F (21° C) and 50% relative humidity in the original carton.

FEATURES

Polyethylene coated scrim backing

Rubber resin adhesive

ADVANTAGES

* Resists moisture

* Conformable

* Hand tears easily

* Good tensile strength

* High tack

* Good holding power

BENEFITS

* Prolongs tape bond

* Easy application

* Ease of application

* Excellent reinforcement

* Provides good seal

* Reduces failure

3M Construction
and Home
Improvement
Markets Division
3M Center
Building 251-1C-09
St. Paul, MN 55144-
1000

IMPORTANT NOTICE: All statements, technical information and recommendations herein are based on tests 3M believes to be reliable. 3M does not warrant or guarantee the accuracy or completeness of this information. User is responsible for determining whether this 3M product is fit for a particular purpose and suitable for user's method of application. Because there are many factors that can affect the use and performance of this product, some of which are uniquely within the user's knowledge and control, it is essential that the user evaluate this product to determine whether it is fit for a particular purpose, is suitable for the user's method of application, and meets the user's performance specifications and expectations.

WARRANTY AND LIMITED REMEDY: This 3M product will be free from defects in material and manufacture for a period of one (1) year from the date of purchase. If this 3M product is defective within the warranty period stated above, your exclusive remedy and 3M's sole obligation shall be, at 3M's option, replacement of the 3M product or refund of the purchase price of the 3M product.

Limitation of Liability: 3M SHALL NOT BE LIABLE FOR ANY LOSS OR DAMAGES, WHETHER DIRECT, INDIRECT, SPECIAL, INCIDENTAL OR CONSEQUENTIAL (INCLUDING BUT NOT LIMITED TO LOST PROFITS, BUSINESS, OR REVENUES) ARISING OUT OF THE USE OF OR INABILITY TO USE THIS 3M PRODUCT. No statement or recommendation not contained herein shall have any force or effect unless contained in an agreement signed by a 3M officer.